

AD-A271 805



Honeywell

(2)

LETTER OF TRANSMITTAL

25 October 1993

Tally I0439/I0495

Ship To: Defense Technical Information Center
Building 5 / Cameron Station
Alexandria, VA 22314

DTIC
ELECTE
OCT 29 1993
S A D

Contract Number: MDA972-91-C-00300
Vacuum MicroElectronics

In accordance with the Terms of the subject contract we are hereby submitting:

Quantity Shipped: 2 Copies
Description: CLIN 000101, CDRL A001
Quarterly R&D Status Report – covering period
07/01/93 - 09/30/93

If this report requires approval or comments, please respond within the appropriate time. Should you have any questions concerning this submission, please contact us at:

Honeywell Inc.
Honeywell Technology Center
Contract Management MN09-E100
10701 Lyndale Avenue South
Bloomington, MN 55420

Phone: 612/951-7501
Contract Data Management

This document has been approved
for public release and sale; its
distribution is unlimited.

Distribution
B. Hui, ARPA DSO
ARPA/OASB/Library
Defense Technical Information Center
F. Buerman/MN65-2415

2 Copies
1 Copy
2 Copies
Letter Only

93-26235

93 10 28 014

REPORT DOCUMENTATION PAGEForm Approved
OMB No. 0704-0188

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.

1. AGENCY USE ONLY (Leave blank)		2. REPORT DATE 10/21/93	3. REPORT TYPE AND DATES COVERED Quarterly Progress Report R&D Status Report 7/01/93 - 9/30/93	
4. TITLE AND SUBTITLE R&D Status Report: Quarterly Progress Report #8 RF Vacuum Microelectronics			5. FUNDING NUMBERS MDA972-91-C-0030	
6. AUTHOR(S) D. K. Arch				
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Honeywell Technology Center 10701 Lyndale Avenue South Bloomington, Minnesota 55420			8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) Advanced Research Projects Agency ARPA/DSO 3701 N. Fairfax Arlington, Virginia 22203			10. SPONSORING/MONITORING AGENCY REPORT NUMBER	
11. SUPPLEMENTARY NOTES				
12a. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution is unlimited			12b. DISTRIBUTION CODE	
13. ABSTRACT (Maximum 200 words) We summarize our progress towards developing a thin film edge emitter vacuum transistor capable of 1 GHz modulation. The first fabrication run of these devices, using the redesigned edge emitter transistors, was completed. Several process issues identified and corrected and a second run of devices has been initiated. Verification of our ability to measure high frequency performance in our high vacuum test station was shown.				
14. SUBJECT TERMS Vacuum microelectronics, edge emitter, thin film technology, high frequency devices, triodes			15. NUMBER OF PAGES 11	
			16. PRICE CODE	
17. SECURITY CLASSIFICATION OF REPORT Unclassified	18. SECURITY CLASSIFICATION OF THIS PAGE Unclassified	19. SECURITY CLASSIFICATION OF ABSTRACT Unclassified	20. LIMITATION OF ABSTRACT UL	

R&D Status Report
RF Vacuum Microelectronics
Quarterly Progress Report #8
(7/1/93 - 9/30/93)

Sponsored by:

Dr. Bertram Hui
ARPA/DSO
3701 N. Fairfax Drive
Arlington, Virginia 22203
Tel: 703/696-2239

Contractor: Honeywell Technology Center
10701 Lyndale Avenue South
Bloomington, MN 55420

Effective Date of Contract: September 30, 1991

Contract Expiration Date: May 31, 1993 (Baseline)

Option Expiration Date: November 30, 1993

Contract Amount: Baseline \$1,315,650

Option: \$ 465,000

Principal Investigator: Tayo Akinwande 612/887-4481

Program Manager: David K. Arch 612/887-4404

Title of Work: RF Vacuum Microelectronics

I. Executive Summary

Technical Approach: Our technical approach is to utilize thin film technology and surface micromachining techniques to demonstrate an edge emitter based vacuum triode. An array of vacuum transistors are connected in parallel to achieve microwave performance. The edge emitter triode approach offers several potential advantages to achieving high frequency device operation (compared to cone emitters or wedge emitters):

- Thin film processes for the films used in the triode process are well controlled and reproducible. Control of film thicknesses to within 5% for the emitter film thickness is easily attainable resulting in a well-controlled edge emitter.
- Device capacitance for the edge emitter is less than that achievable for cones or wedges resulting in potentially higher frequency operation.
- The fabrication process is a planar process, compatible with most silicon IC manufacturing.

Program Objective: Demonstrate an edge emitter based microwave vacuum transistor with gain at 1 GHz continuously for 1 hour.

Key Achievements (this reporting period)

- Started fabrication of a microwave vacuum transistor run
- Modified the microwave vacuum transistor process to improve yield.

Accession For	
NTIS OR	✓
DTIC TAB	✓
Unannounced	✓
Justification	
By	
Distribution	
Availability Codes	
Dist	Avail and/or Special
A-1	

II. Milestone Status

	<u>Completion Date</u>		Comments
	Planned	Actual	
Task 1. Field Emitter Development			
Test Structure Design Complete	12/91	1/91	complete
Determine Workable Emitter Structure	3/92	12/92	complete
Demonstrate Emission Current of 10 μA/μm	11/92	11/92	complete
Deliver 10 Field Emitting Diodes	12/92	10/92	delivered
Task 2. Process Development			
High Resistivity Thin Film Resistor	4/92	9/92	complete
Complete Dielectric Studies	5/92	6/92	complete
Mechanical and Electrical FEM Analysis	5/92	8/92	complete
Task 3. Triode Development			
Triode Design Complete	4/92	5/92	complete
Demonstrate Reliable/Uniform Current Emission	7/92	10/92	complete
Demonstrate Modulated/Edge Emitter Triode	8/92	12/92	complete
Demonstrate 1 GHz Modulation of Triode	2/93	12/92	behind plan
Deliver 2 Triodes	3/93	8/93	complete
Task 4. Final Report (Baseline)			
	4/93	4/93	complete
Task 5. High Frequency Demo			
Design Microwave Vacuum Transistor	6/93	6/93	complete
Complete Process Development	6/93	6/93	complete
Complete High Frequency Probe Assembly	6/93	6/03	complete
Demonstrate Vacuum Transistor with High Current	10/93	10/93	on plan
Demonstrate 1 GHz Modulation with Gain	10/93	10/93	on plan

III. Technical Progress

Microwave Vacuum Transistor Fabrication

We started the fabrication of the microwave vacuum transistor. We have completed 90 % of the process steps for the run. We discovered, however, that we require further process development and some mask modifications to yield the microwave vacuum transistor.


Figures 1 and 2 show SEM analysis of some of the devices. The devices are about 90 % complete. The figures show the emitting edge between the two control electrodes encapsulated by a nitride layer. The emitting edge is exposed as expected. The individual device segments look excellent as shown in the SEM. The microwave vacuum transistor is an array of these individual device segments. The device segments are connected in parallel with metal runners such that all emitters are connected together and all control electrodes (gates) are connected together and all anodes are connected together. In order to simplify the process and reduce the number of masks and fabrication steps, we made the metal runners out of existing layers. This implied that the metal runners would have cross-overs. We found during the course of the fabrication that these metal runners that interconnect individual device segments do not cover steps very well and are not continuous over these steps.

We have made adjustments in our process through a combination of changing the layout / design rules and making slight changes to some process steps. We have started a new fabrication run (Run #2) which will be completed mid-to-late October. We shall begin testing immediately upon device completion.

Microwave Vacuum Feedthrough Probes

We verified that the vacuum probes do work on GaAs wafers at 2 GHz. Figure 3 is a plot of the high frequency characteristics of the GaAs chip before probe-tip calibration. The device is a GaAs chip with a drain current of 20 mA, V_d of 3V and V_g of -0.44V. The plot shows a 10 dB gain at 2 GHz. Figure 4 is a plot of the same chip after the calibration of the probes at the tip. It also shows 10 dB gain at 2 GHz, however the curve is much smoother with a slight roll-off. Figure 5 is a plot of S parameters of the device after probe tip calibration. We shall re-do the calibration in the vacuum system prior to device testing.

IV. Fiscal Status

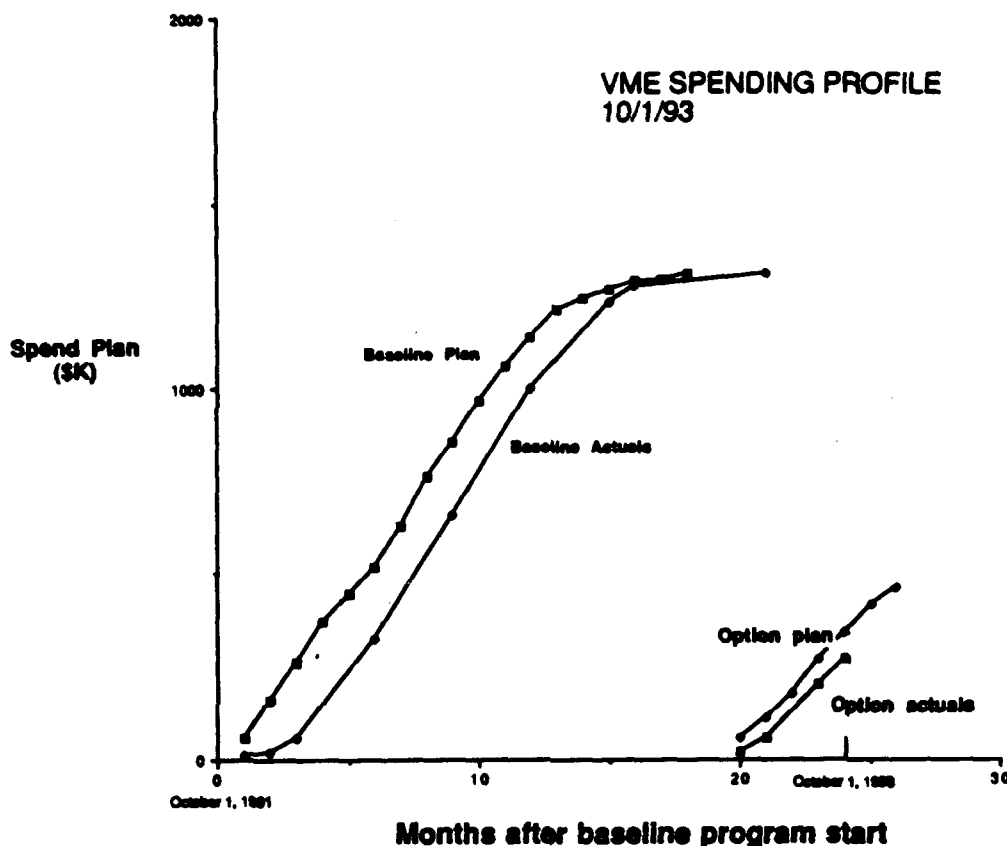

	<u>Baseline Program</u>	<u>Option Phase</u>
Expenditures this quarter	\$ 87K	\$210K
Total expenditures to date	\$1,395K	268K
Projected expenditures (baseline):		
10/93 - Program Completion	0	197K
Total Projected Cost for Program	\$1,315,650*	\$465K

*Total cost to ARPA. The remaining funding for the baseline program (~\$80K) is being cost-shared by Honeywell through a limitation of its overhead rates. In addition, as a result of the February 1, 1993 program review with ARPA, Honeywell agreed to an additional investment (internal development funds) of approximately \$71K to provide further testing, testing enhancements and process enhancements to the VME effort. Of this \$71K committed all has been spent.

Plans for Next Reporting Period

- Complete fabrication of run #2.
- Complete dc and ac characterization of VME devices from run #2.
- Demonstrate 1 GHz modulation on a thin film edge emitter triode device.

V. Programmatics

- Our paper entitled "Monolithic Lateral Thin-Film-Edge-Emitter Vacuum Transistor" was presented at IVMC in Newport, Rhode Island in July.



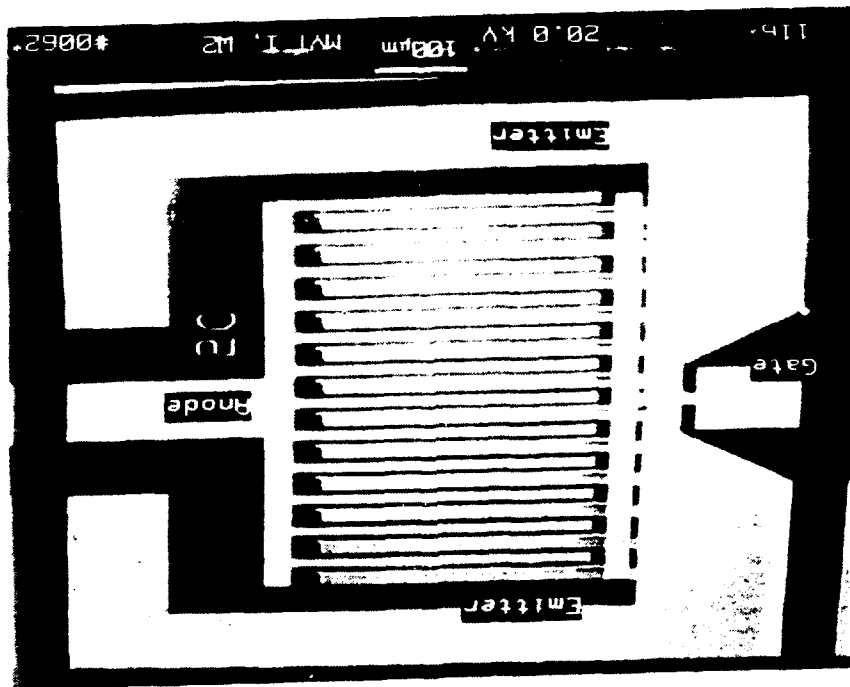


FIGURE 1. SEM of the Microwave Vacuum Transistor. It shows the individual electrodes - anode, emitter and gate.

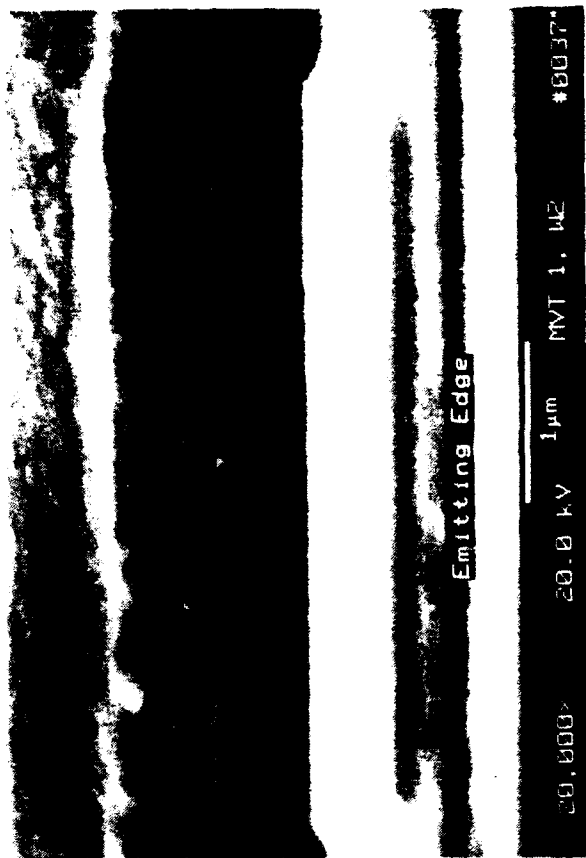


FIGURES 2a & b.
SEM of the Microwave Vacuum Transistor showing the gates and the emitting edges.

TEST FET FOR VACUUM PROBES $V_{GS} = 0$ $V_{DS} = -0.7$ $I_D = 10$ mA

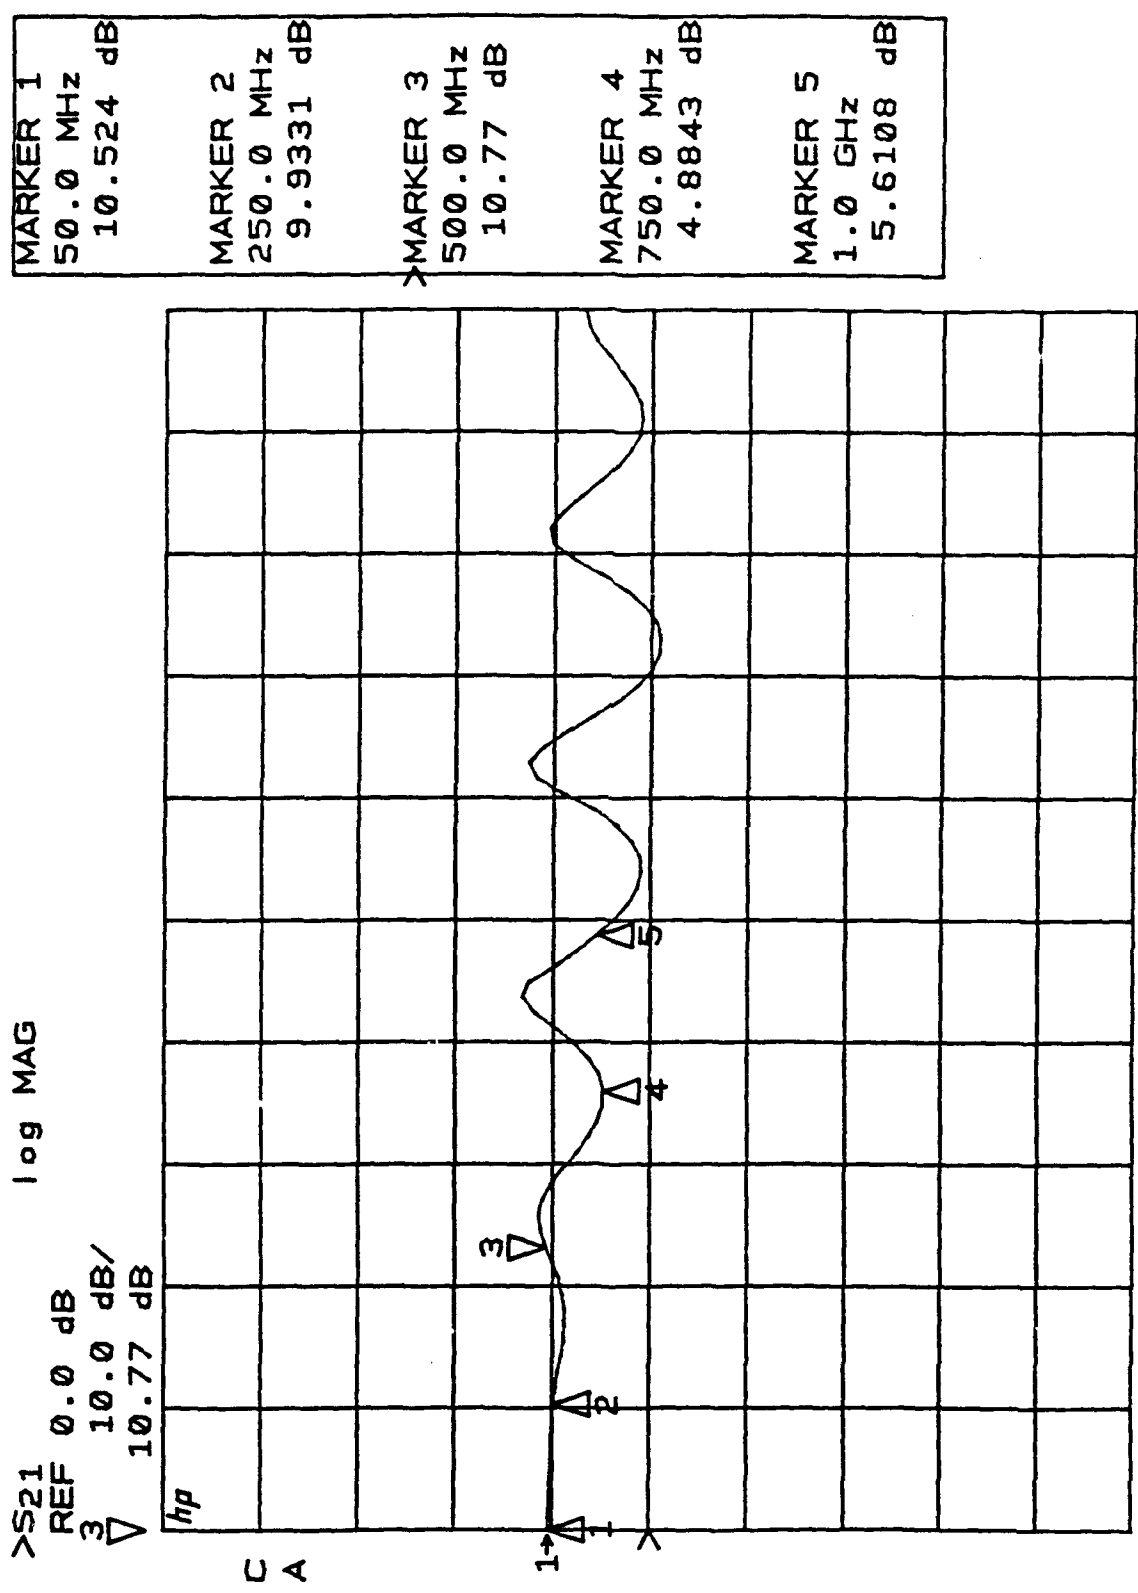

START 0.050000000 GHz
 STOP 2.000000000 GHz
FIGURE 3. Vacuum Probe Test of a microwave GaAs FET for 0-2 GHz.
 The test shows that the probes have very little insertion loss and feedthrough in the frequency range of interest for the MVT.

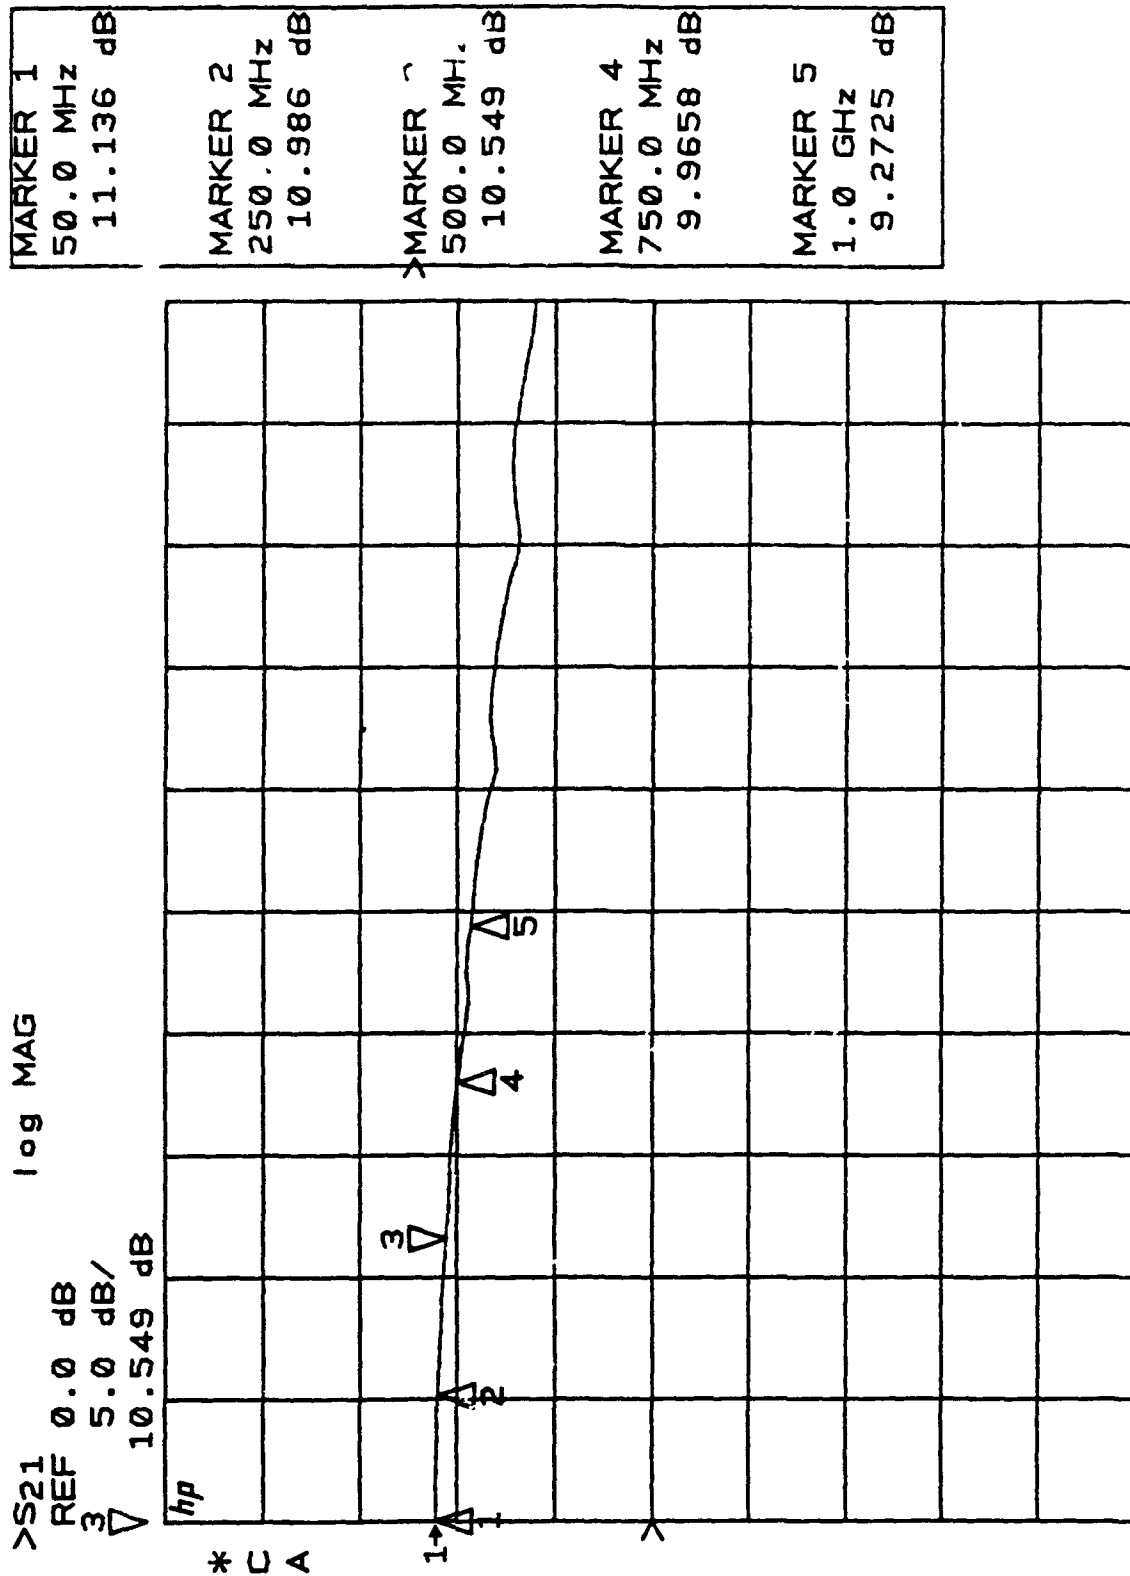

START 0.050000000 GHz
STOP 2.000000000 GHz

FIGURE 4. Vacuum Probe Test of a GaAs FET from 0-2 GHz. The probes have been calibrated. The test shows less than 5 dB loss over the range of interest for the MVT.

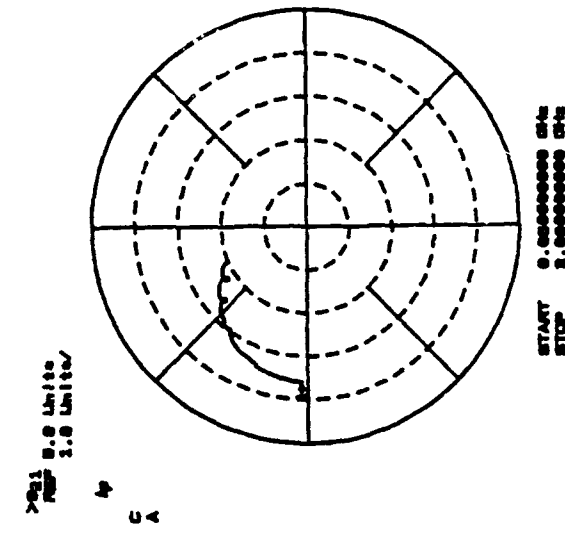
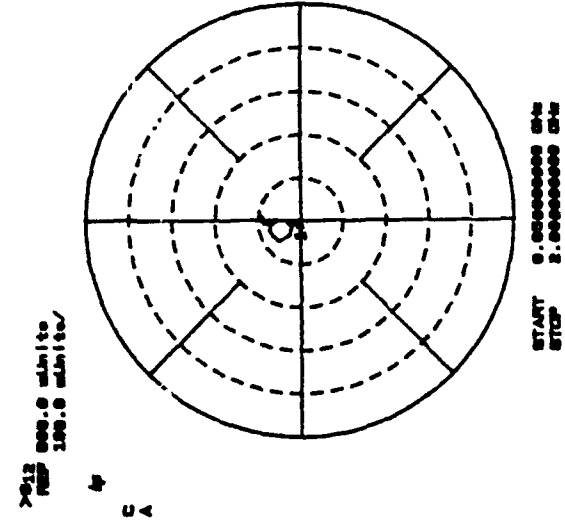
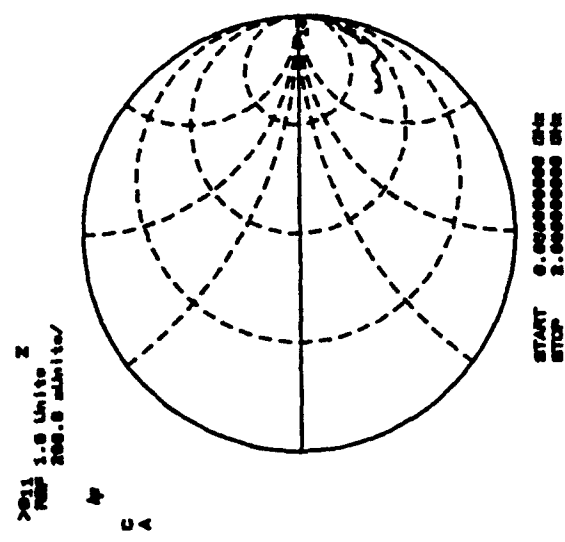
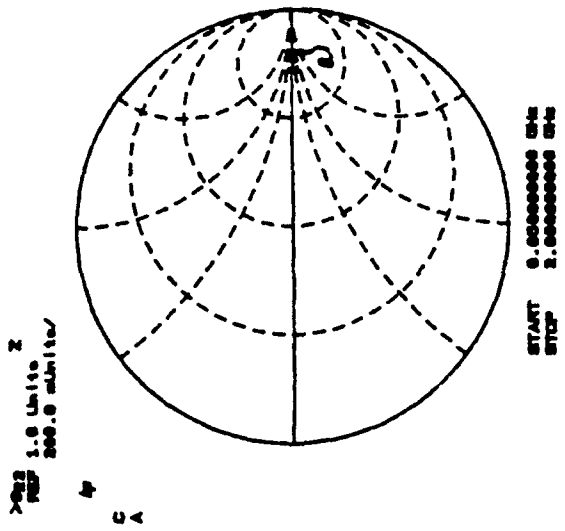


FIGURE 5. Vacuum Probe Test of a GaAs FET. S-parameters of the device are plotted in the 0-2 GHz frequency range. The test shows that the vacuum probes will be adequate for testing the MVT.